


Specifications			
Max. load	Static load	P	120 N/mm <sup>2</sup>
	Dynamic load	P	40 N/mm <sup>2</sup>
Max. sliding speed	Grease lubricated	v	2 m/s
Service temperature	Min.	t	-40 °C
	Max.	t	+150 °C

Characteristics	
High load	Very suitable for low and high speeds
Easy lubrication	Lubrication through housing bore(s)
Good thermal conductivity	

Applications
Hydraulic cylinders, agricultural equipment, textile machinery, spherical plain bearings, construction machinery, medical technology,

**Material Structure**

**Tin-bronze with through-holes**

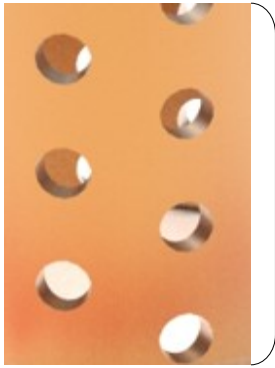

Tin-bronze

Through-holes

Exemplary illustration